



# AlucoSign Colour ACM



AlucoSign Colour is a fabrication grade composite panel with a polyethylene core situated between two thin layers of aluminium, which are coated with a FEVE paint finish for an outstanding exterior performance.

The result is a lightweight sheet, with excellent flatness, durability & flexural stiffness with a ten year exterior warranty. AlucoSign comes in a range of corporate colours with new colour matching available on request.


## Features

- Weather resistant
- Won't warp
- Gloss finish
- Lightweight
- Can be fabricated
- Colour matching to corporate colours available
- FEVE paint finish
- - 10 year exterior warranty
- Available in 9 colours

## Applications

- Signage
- Corporate signage
- Retail fit out
- Fascias
- Industrial applications

## COLOUR RANGE *(May not represent the physical product)*

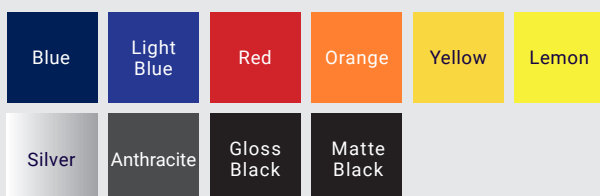

PRODUCT RANGE/DIMENSIONS		
Type	Thickness	Length & Width
Gloss Black/Satin White	4.0mm 0.3mm/0.3mm	2440mm x 1220mm 3050mm x 1500mm 3650mm x 1500mm 4050mm x 1500mm
Satin Black/Service Coat	4.0mm 0.3mm/0.3mm	2440mm x 1220mm 3050mm x 1500mm
Anthracite/Silver, Gloss Red/Service Coat, Gloss Orange/Service Coat, Lemon Yellow/Service Coat, Gloss Yellow/Service Coat, Gloss Light Blue/Service Coat, Gloss Dark Blue/ Service Coat	4.0mm 0.3mm/0.3mm	2440mm x 1220mm 3050mm x 1500mm

PANEL PHYSICAL PROPERTIES	
Type	Result
Weight (4.0mm)	5.7kg/m <sup>2</sup> (4.0mm)
Service Temperature	-50°C - +80°C
Expansion/Contraction Rate	2.4.0mm/m
Rigidity	1620kNcm <sup>2</sup> /m
Sound Transmission Loss	25dB
Fire Rating	Group 4
Warranty	10 year

**NOTE:** Uncontrolled in printed format.